


BACKFRAMING SPECIFICATIONS

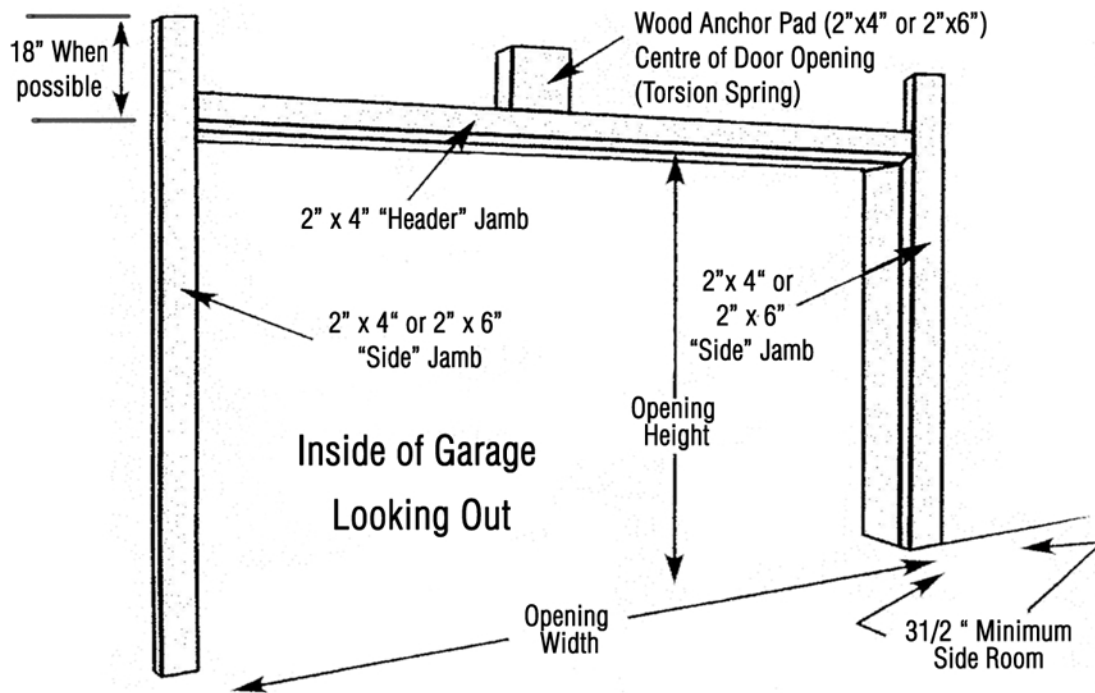

Preparing the Opening

On the inside of the garage, your opening should be framed with wood jamps 2"x 4" or 2"x 6". The side jamps should extend 18" above the opening if possible. Consult with installer for minimum requirements for your particular installation. Finished opening should be same size as door being installed. The jamps should be plumb and the header level. If there are any bolts fastening the jamps to the wall, the heads should be flush so they don't interfere with the installation of your new door.